

CREST NELSKAMP ROOFING TILES

H10 clay pantile



H10
in Natural Red

crest
NELSKAMP
ROOFING TILES

t: 01430 432667

www.crest-bst.co.uk

f: 01430 433000

e: info@crest-bst.co.uk

Manufactured to comply with the requirements of EN1304 European Standard for Clay Roof Tiles

H10 Large Format Double Interlocking Clay Tile


▶ High quality clay tiles ▶ Minimum roof pitch 10° ▶ Economical ▶ Only 10 tiles per m²

H10 Technical details

Length	488 mm
Width	299 mm
Gauge	369-399 mm
Cov' Width (mm)	246 ± 2.0
Min' roof pitch*	10°
No. of tiles per m ²	10
Weight per tile	4.6 kg
Weight per m ² (min.)	47.3 kg
Battens per m ² (min)	2.6
Batten size (mm)	50 x 25
Fixing	Clipped

Fittings:

A wide choice of fittings are available including those below.

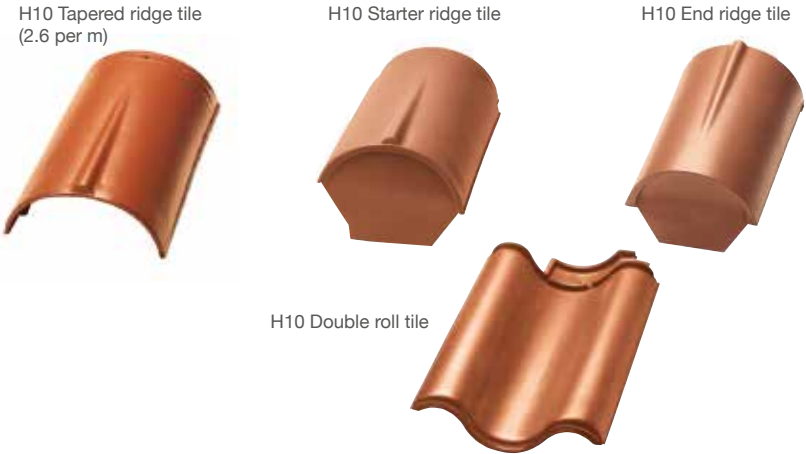

Low roof pitches

H10 perfect for lower roof pitches 10°-22°:

- Counter batten the roof and ensure adequate ventilation.
- Use high quality low pitch roof underlay (Klober Permo Extreme or equivalent) installed to manufacturers instructions
- Increase the overlap by 100mm
- Batten tape over the underlay coinciding with rafters and any other fixing points.
- The gauge of the tiles should not be 'stretched'
- All tiles are to be mechanically fixed with purpose made tile clips.
- Always ensure good ventilation.
- All areas around the roof perimeter and abutments must be properly finished as well as any areas around any 'velux type' windows (These are the areas where potential problems are likely to occur on a low roof pitch.)

The H10 range of colours:



crest
NELSKAMP
ROOFING TILES



For more information on the H10 Tile or to order a sample call us on **01430 432667**