

# CREST NELSKAMP ROOFING ADVICE

## Verge and Perimeter Tiles Fixing Instructions for Clay Tiles and Low Pitch Roofs Below 17.5°.



All verge and perimeter roof tiles should be twice fixed where possible, with appropriate clips and screws with neoprene washer.

### Right Hand Verge.

Right Hand Cloaked Verge Tiles are supplied with a pre-formed fixing hole. All right hand verge tiles should be fixed with the appropriate tile clip and screwed using 45mm screw with a neoprene washer.

If standard clay tiles are used to form the right hand verge, they must be drilled to form the screw hole.

Concrete tiles can be twice fixed using screws with neoprene washers.


### Left Hand Verge.

Left Hand Cloaked Verge and Double Roll/ Left Hand Verge Tiles are supplied with a preformed fixing hole. All left hand verge tiles should be fixed with a minimum of 1 no 45mm screw with a neoprene washer.

Concrete tiles can be twice fixed using screws with neoprene washers.



Screw fixing with neoprene washer.

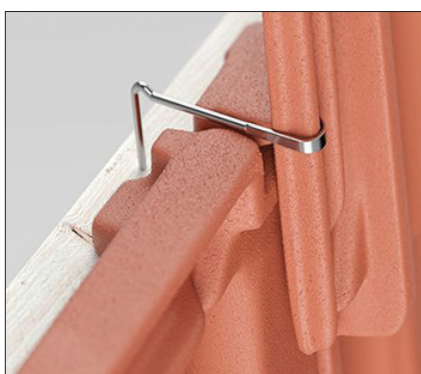

All clay and concrete roof tiles should be mechanically fixed.



Crest Nelskamp clay right hand cloak verge.

Crest Building Products supply screws with neoprene washers, tile clips and verge clips.  
Please contact Crest Technical Department for advice on Site Fixing Specifications.

For further technical support and information please contact  
Crest on tel: 01430 432 667 or email: [info@crest-bst.co.uk](mailto:info@crest-bst.co.uk)

**crest**  
**NELSKAMP**  
ROOFING TILES