

crest

Yorvik Restoration

Yorvik Restoration

size

50mm & 65mm

compressive strength

25N/mm²

water absorption

17%

durability

FL / F2

weight per pack

50mm: 1500kg, 65mm: 1600kg

pack size

50mm: 935, 65mm: 730

active soluble salts content

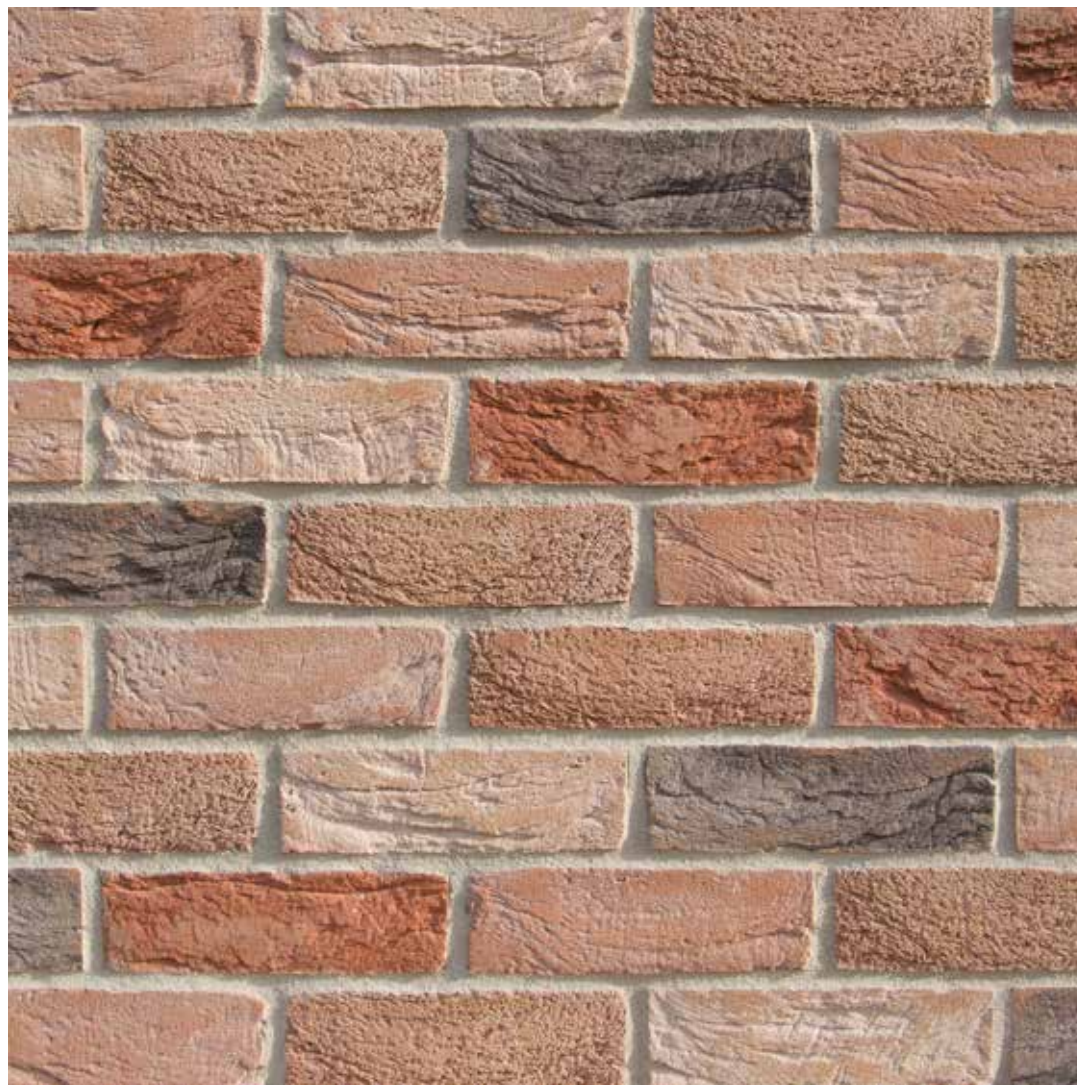
S2

dry weight per brick

50mm: 1.6kg, 65mm: 2.19kg

dimensional tolerances

T1 Range Category R1

**call us**

01430 432667

email

info@crest-bst.co.uk

www.

crest-bst.co.uk

visit our showroom

Howdenshire Way
Knedlington Road
Howden
DN14 7HZ

CE EN 771-1 Cat. I - HD

The colours shown on this card can vary due to limitations of the printing process and variation if viewed on a screen or monitor. With this in mind we advise all customers to view a sample of the actual product before ordering. Crest Bricks are manufactured from natural raw materials and are subject to slight colour variations, which usually enhance their appearance, please consider that the appearance of brick products can differ in various lighting and weather conditions. Crest reserve the right to change designs without notice. All products are subject to availability and our standard conditions of sale which are available on request.

crest
BUILDING PRODUCTS